
ATS1481

ATS Reader Address Configuration Card for Smart Card Readers

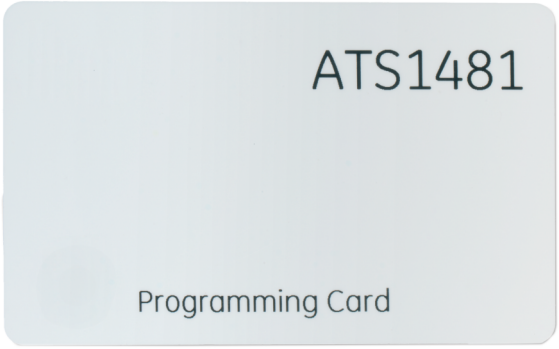

Details

- Instructions on flip side of the card

ATS1481

ATS Reader Address Configuration Card for Smart Card Readers

Technische specificaties

System

Custom data model	No
Supported readers	ATS Proximity Readers

Technology

Credential type	Configuration card, Proximity
Credential operating frequency	125 KHz

Printing

Direct surface printing	Yes

Ordering information

Minimum order quantity	1
Cards/tags in package	1

Physical

Material	PVC
Form factor	CR80 (Credit)
Colour	White
Card Label	Programming Card

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57