
ATS4500A-IP-MM

Advisor Advanced ATS4500A-IP control panel in large metal housing, Intergrated Ethernet connection, EN grade 3, 8 - 512 zones, 64 areas, 2.5A PSU. Wired or wireless (hybrid) using

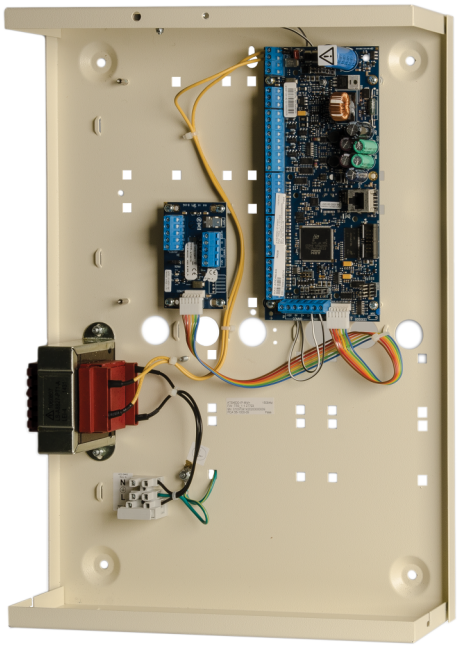

Details

- 8 onboard zone inputs
- Max 512 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 64 areas
- Up to 1000 users
- EN50131 Security grade 3
- USB port for local configuration
- Up to 32 keypads/Readers
- Up to 30 DGPs
- Second ATS LAN Data Bus included (ATS670)
- Multilingual: each user his own language
- Integrated 10/100Mb Ethernet connection
- IP Alarm reporting to OH-NETREC receiver / GPRS optional
- U/D over IP / GPRS
- IP Diagnostics
- Dynamic/Static IP address & DNS support
- Plug-on PSTN dialler for reporting or configuration
- Auto Arming - Schedules - Timed outputs
- Door Shunt functionality

ATS4500A-IP-MM

Advisor Advanced ATS4500A-IP control panel in large metal housing, Intergrated Ethernet connection, EN grade 3, 8 - 512 zones, 64 areas, 2.5A PSU. Wired or wireless (hybrid) using

Technische specificaties

System

Product line	Advisor Advanced
Product type	Integrierte Zugangskontrolle
Panel type	Hybrid
Kit	No
No. of keypads / readers	32
Data Gathering Panels (DGP)	30
No. of alarm groups	128
Specified cable	WCAT52 / WCAT54

Inputs

Max no. of inputs	512
Onboard inputs	8
Inputs plug-in expansion	8

Outputs

No. of outputs	512
No. of onboard outputs	5

Area

No. of areas	64

User/Cards

Max. no. of users	more than 2000
Max. no. of cards	1000
Max. no. of PIN codes	200

Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, PSTN
Databus type	RS485

Electrical

Power supply type	230 VAC
Power supply value	230 VAC +10%, −15%, 50 Hz
Mainboard current consumption	150 mA
Max system current	2350 mA at 13.8 V
Max aux power current	1350 mA
Auto-reset fuses	5
Glass break fuses	1

Physical

Physical dimensions	315 × 388 × 85 mm
Material	Stahl (lackiert)
Housing	Mittleres Metall

Environmental

Operating temperature	-10 to +55°C
Relative humidity	0.95
Environmental Class	Class II, indoor
IP rating	30

Regulatory

EN50131 Grade	Grad 3
Compliancy	CE
Certification	CE

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57