POE302-EX

1-Port 10/100/1000Base-Tx IEEE802.3af Copper to a 1-Port 10/100/1000Base-Tx IEEE802.3at Copper Mid-span Extender (1x 30W PoE Budget - up to 300m) (-10° ~ 60°C) - Stand-alone or

Overview

The IFS Power over Ethernet Extender is a quick and easy solution that can be used when a Powered Device (PD) needs to be installed beyond the 100 meter (328 ft.) distance limitation of Ethernet.

The module can be powered from any network switch with PoE IEE802.3at or from an IFS POE302-MS Mid-Span Power Injector.

This module provides the ability to extend Ethernet data and PoE power on a single network cable for remote deployment of an Ethernet powered device (PD) i.e. IP camera, access control panel, VoIP or wireless access point (WAP).

The IFS POE302-EX is powered via the PoE power provided by a PoE switch or injector and thus does not require an external power adapter. Each extender requires just 3 watts of PoE power providing the remaining power to the next extender or PD device.

Up to three POE302-EX extenders can be daisy-chained at 328 ft. (100m) intervals, based on the EIA-568 standard, to extend Ethernet data and PoE power up to 984 ft. (300m). Maximum distance (or hops) is dependent upon the remaining PoE power available to meet the PD power requirements.

The POE302-EX facilitates easier network planning by eliminating restrictions of edge device placement near AC power outlets and reducing the need for AC wiring and installation costs while delivering higher reliability. This results in a cost-effective remote power and data distribution cable management solution for a PoE-centric IP network.



Dettagli

- Plug-and-play PoE+ self-powered design
- Can be used with an IFS PoE Injector or other IEEE 802.3at compliant PSE equipment
- Supports 10/100/1000Base-TX Ethernet
- Auto-detect of PoE equipment providing protection from incorrect installation
- Current overload detection
- LED Indicators for PoE In, PoE Out, Data
- Can be daisy-chained to extend data and PoE on a single network cable a maximum of 300m.

POE302-EX

1-Port 10/100/1000Base-Tx IEEE802.3af Copper to a 1-Port 10/100/1000Base-Tx IEEE802.3at Copper Mid-span Extender (1x 30W PoE Budget - up to 300m) (-10° ~ 60°C) - Stand-alone or

Specifiche tecniche

General

Category	PoE Verlenger
Port type	Kobber (RJ45)
Port speed	Gigabit

Physical

Material	Metal

Environmental

Environment	Indendør

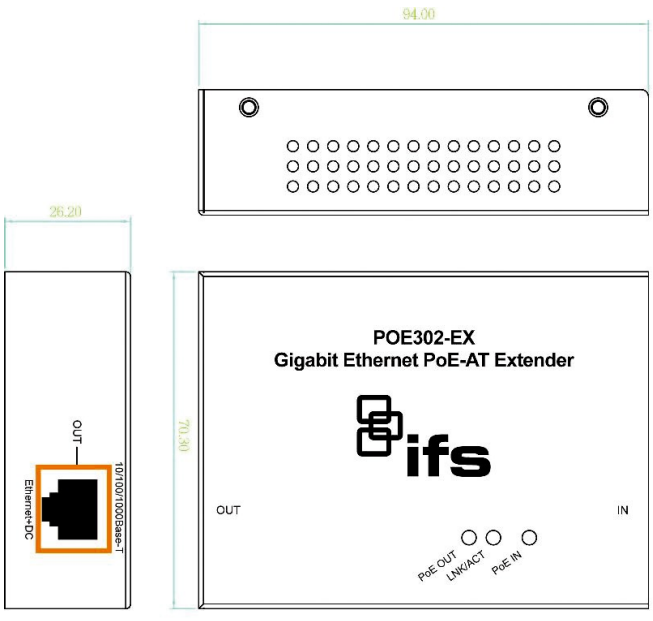

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 20:20