
# ACT407E

## (25 PACK) Mifare Classic card S50 with 7-byte UID serial number (CSN)

### Product overview

These Mifare Classic1k cards are to be used on ATS1160N/ATS1161N, ACI406/ACI407 and any other KGS Fire & Security Mifare or Transition reader supporting 7-byte Card Serial Numbers (CSN). The cards are unprogrammed and only the unique 7-byte ID-number of the Mifare® chip, the so called Chip or Card Identification Number (CSN) is used by the readers.

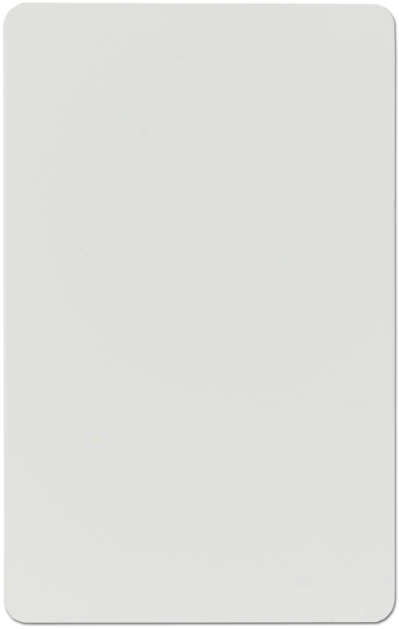

### Details

- Read only for CSN (7-byte)
- Read / Write function for card sectors
- Packed by 25

# ACT407E

## (25 PACK) Mifare Classic card S50 with 7-byte UID serial number (CSN)

## Technical specifications

### System

| | |
|---|---|
| Reading distance | 0 to 10 cm |
| Memory size | 1K |
| No. of Mifare bytes CSN | 7 Byte (S50) |
| Supported readers | Leitores Mifare ACI406/407, Leitores Mifare ATS1160/1161 |

### Technology

| | |
|---|---|
| Credential type | Nærhed |
| Credential operating frequency | 13.56 MHz |
| Supported technology 13.56 MHz | MIFARE Classic (CSN) |

### Ordering information

| | |
|---|---|
| Cards/tags in package | 25 |

### Physical

| | |
|---|---|
| Material | PVC |
| Form factor | CR80 (Crédito) |
| Physical dimensions | 86 x 54 mm |
| Colour | Hvid |

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 18 June 2026 - 14:24